

Type	OPEN KETTLE DONUT FRYERS (Gas)
Models	718L • 724 • 734 (CG and FG models)

VIDEO: <https://vimeo.com/belshaw/openkettle>

718LCG, 724CG, 734CG 718LFG, 724FG, 734FG Open Kettle Gas Fryers

CG = Electronic ignition, electronic temperature control
FG = Standing pilot ignition, thermostat control

Belshaw Adamatic open kettle gas fryers are designed to efficiently produce all varieties of cake donut and yeast raised donut. Almost any size and shape of donut (or similar product) can be fried in these adaptable and dependable fryers.

- **Compact.** The space needed to operate a Belshaw Adamatic 718LCG gas or electric fryer is just 6 feet x 3½ feet (1.8m x 1.1m), including cake donut depositor and open drain tray. Larger models need only slightly increased space allowance.
- **Productive.** You can make from 65 to 150 dozen donuts per hour on one of three standard sizes. That leaves more time to finish and customize your donuts exactly the way you want.
- **Efficient.** Belshaw Adamatic's 'Controlled Combustion' burner tube technology maximizes gas efficiency and generates energy savings throughout the life of the fryer. The advanced 'Omron' controller keeps temperature within a much narrower band than the thermostats used in older fryers.
- **Convenient.** With a Belshaw Adamatic Open Kettle donut system, the fryer, cake donut depositor, and filtration system are each designed to work together. Easy-to-use submerger screens can be added to further improve production efficiency.

Products made commercially using floor model gas fryers:

- Donuts
 - Hushpuppies
 - Loukoumades
 - Funnel cakes
 - Elephant ears
- + More fried goods of all kinds

Belshaw provides a full line of companion equipment designed for donut production:

- EP18-24 Proofing Cabinet
- Type B or Type F cake donut depositors
- EZ Melt Shortening Melter-Filter
- SF Shortening Filter
- HI18/HI24 Production Icers
- H&I-2 / H&I-4 Icing Tables
- HG, HGEZ Hand Glazers




718L

CG or FG

Holds up to
24 Donuts

Capacity approx
**65-80
dozen/hour**



18" (46cm)


26"
(66cm)

724

CG or FG

Holds up to
36 Donuts

Capacity approx
**80-120
dozen/hour**



24" (61cm)


24"
(61cm)

734

CG or FG

Holds up to
48 Donuts

Capacity approx
**130-150
dozen/hr**



34" (86cm)

24"
(61cm)

90 Years of Quality Donut & Bakery Equipment

BELSHAW ADAMATIC BAKERY GROUP

814 44th St NW, Suite 103
Auburn, WA 98001 USA

PART OF ALI GROUP S.P.A.

CONTACT



800.578.2547 (USA/Canada)
(+1) 206.322.5474 Worldwide
info@belshaw.com

© 2015 Current version available at www.belshaw-adamatic.com

WEB

www.belshaw-adamatic.com

Type	OPEN KETTLE DONUT FRYERS (Gas)
Models	718L • 724 • 734 (CG and FG models)

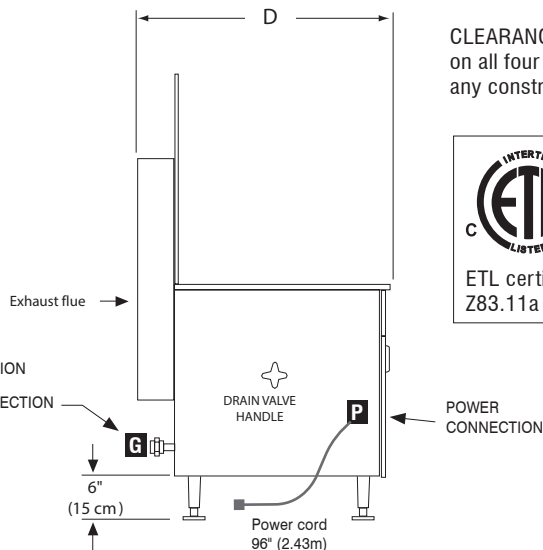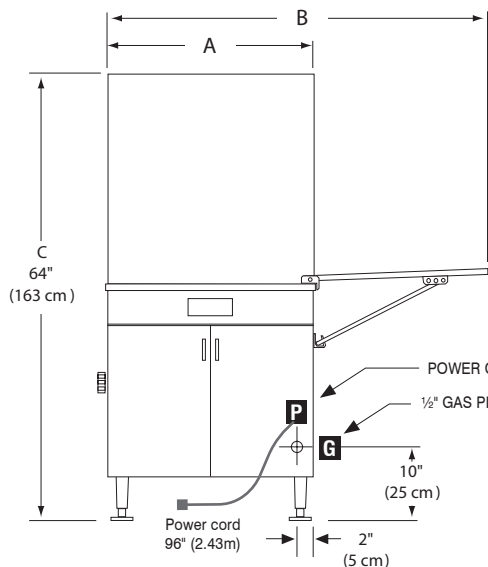

CLEARANCE: Allow 2 inches (5 cm) on all four sides between fryer and any construction



STANDARD FEATURES

- Stainless steel cabinet, kettle, and drain tray, with sloping surface around fryer kettle
- Electronic ignition (standing pilot optional, see below)
- Highly accurate electronic temperature controller (standard thermostat control optional for 'FG' models, see below)
- High-temperature limit switch set to approximately 450°F (230°C)
- Adjustable, bolt-down legs
- Drain tray on right side of fryer. Can easily be relocated to left side.
- Heavy duty drain and valve with exterior handle
- 2 nickel plated cake donut frying screens with handles
- Tall backsplash
- Exhaust flue
- Frame reinforcement for mounting a Belshaw Cake Donut Depositor, installed at left. Can be moved to right.
- 120 Volts or 240 Volts, 50/60Hz, 1-phase (specify) on CG models. No electricity required on FG models.
- Natural Gas and Propane models are available. A conversion kit is available if changeover is needed
- ETL certified to NSF-4, ANSI Z83.11a and CSA1.8a.2004

OPTIONS AND ACCESSORIES

- Standing pilot ignition and thermostat temperature control – no electricity required. (Standing pilot models are designated: 718LFG, 724FG, 734FG)
- Submerger screen
- Draft inducer kit (recommended for Propane models, and for Natural Gas above 3,000 ft)
- Type B (manual) or Type F (electric) cake donut depositor
- 'SF' or 'EZMelt' filtration systems
- Proofing screens for raised donuts (no handles)
- Detachable handles OR Screen Cradle for lifting hot screens from fryer

VENTILATION AND FIRE SUPPRESSION

- Customer is responsible for installation of ventilation hood and/or fire suppression as required by local codes.

SPECIFICATIONS

SPECIFICATIONS		718LCG	724CG	734CG
FRYING AREA	inches	18" x 26"	24" x 24"	34" x 24"
	cm	46 x 66 cm	61 x 61 cm	86 x 61 cm
SCREEN SIZE	inches	17" x 25"	23" x 23"	33" x 23"
SHORTENING CAPACITY (approx)	lbs	96 lbs	119 lbs	215 lbs
	kg	44 kg	54 kg	98 kg
	gallons	13 gal	16 gal	29 gal
	liters	49 L	61 L	110 L
BTU/hour		44,000	60,000	89,000
GAS CONNECTION	inches	Natural Gas 5"-14" W.C – Propane 11"-14" W.C.		
	pascal	Natural Gas: 1.24–3.4 kpa – Propane: 2.4-3.4 kpa		
	connector	1/2" NPT		
VOLTS	volts	120V-50/60-1 or 240V-50/60-1 (specify)		
AMPS	amps	0.5 A @120V or 0.25 A @240V		
PLUG		NEMA 5-15P (120V) or NEMA 6-15P (240V)		
CORD LENGTH		8 feet (2.5 m)		
WIDTH (A) <i>(drain tray CLOSED)</i>	inches	27"	32"	42"
	cm	69 cm	81 cm	107 cm
WIDTH (B) <i>(drain tray OPEN)</i>	inches	48"	56"	77"
	cm	122 cm	142 cm	196 cm
HEIGHT (C)	inches	64"	64"	64"
	cm	163 cm	163 cm	163 cm
DEPTH (D)	inches	40"	38"	38"
	cm	102 cm	97 cm	97 cm
SHIPPING DIMENSIONS <i>(crate)</i>	inches	40 x 48 x 54	40 x 48 x 54"	50 x 45 x 52
	cm	102x122x137	102x122x137	127x114x132
SHIPPING WEIGHT	lbs	282 lbs	296 lbs	417 lbs
	kg	128 kg	135 kg	190 kg
FREIGHT CLASS		85	85	85

90 Years of Quality Donut & Bakery Equipment

BELSHAW ADAMATIC BAKERY GROUP

814 44th St NW, Suite 103
Auburn, WA 98001 USA

CONTACT

800.578.2547 (USA/Canada)
(+1) 206.322.5474 Worldwide
info@belshaw.com

WEB

www.belshaw-adamatic.com